

BAT 300

TEMPEST TECHNOLOGY

The first and only
battery-operating fogging system

ANTI-NTRUSION/ANTI-THEFT



Physical features

Dimensions (height x width x depth) mm	300 x 200 x 150
Weight included batteries (Kg)	7,6
Weight without batteries (Kg)	1,9
Color	Pure white RAL 9010

Fluid

Fluid cartridge capacity (ml)	125
Disposable non-pressurized cartridge	Yes
Certified White Out Food Grade fluid	Yes



Electrical features

Power supply	Battery
Battery model	N. 2 custom built lead acid VRLA 12 V - 9 Ah batteries
Autonomy without external power supply	About 6 months (at 6 months a full time shoot is guaranteed)
Autonomy with external power supply	*No limit. Battery replacement recommended every 2 years
Inbuilt battery charger	Yes with two external charging current options: 10-16 V / 350 mA and 1 A
External battery charger	Yes optional
Average power consumption	Low power mode: 2-3 mW - Always on mode: 1,2 W
Heating time from cold	Immediate at the time of shot
Temperature management	Self-balancing of shot with patented system

Performance

Performance (m³) visibility 1 meter
(Standard EN 50131-8:2019)

100 m³ with zero visibility
(UR FOG standard) in 60 seconds

Number of shots with one cartridge

25 m³ (8 shots) - 50 m³ (4 shots)
- 100 m³ (2 shots)
+ 1 extra test shot

Shot times (sec)

2 (test shot) - 15 (25m³)
- 30 (50m³) - 60 (100m³)

Technical features






Proprietary technology	Yes, covered by 2 international patents
Compatible with any alarm system	Yes
OEM (Original Equipment Manufacturer) version	Available
Mounting positions	Vertical (wall/shelf)
Operating temperature range	-10°C +50°C
Inputs	3 wired inputs Arming, Shooting and PIR / Panic
Outputs	3 wired outputs (max 16 V - 50 mA): empty fluid, fault, low battery
Serial ports	2 Serial interfaces RS232 with UR FOG Standard protocol for expansions
Microswitch tamper for cover	Optional
External signaling LEDs	3: Red Fault - Green Ready - Blue Armed
Signaling buzzer	Yes
LAN/WiFi board	Yes (not included)
Registration on Active CCloud	Yes
Multi-hole and directional nozzles	No
Nozzle extension	No

Accessories and refills

BAT 300 (Fluid refill and 2 battery included)
Battery
Fluid refill
Active Cloud lan/wifi board with cables (wifi opt.)
Wifi antenna module
24V - 12V adapter cable (Active Cloud, etc.)
External fast charger
220V power supply
Silicone nozzle protection
Orientable wall bracket


BAT 300

TEMPEST TECHNOLOGY

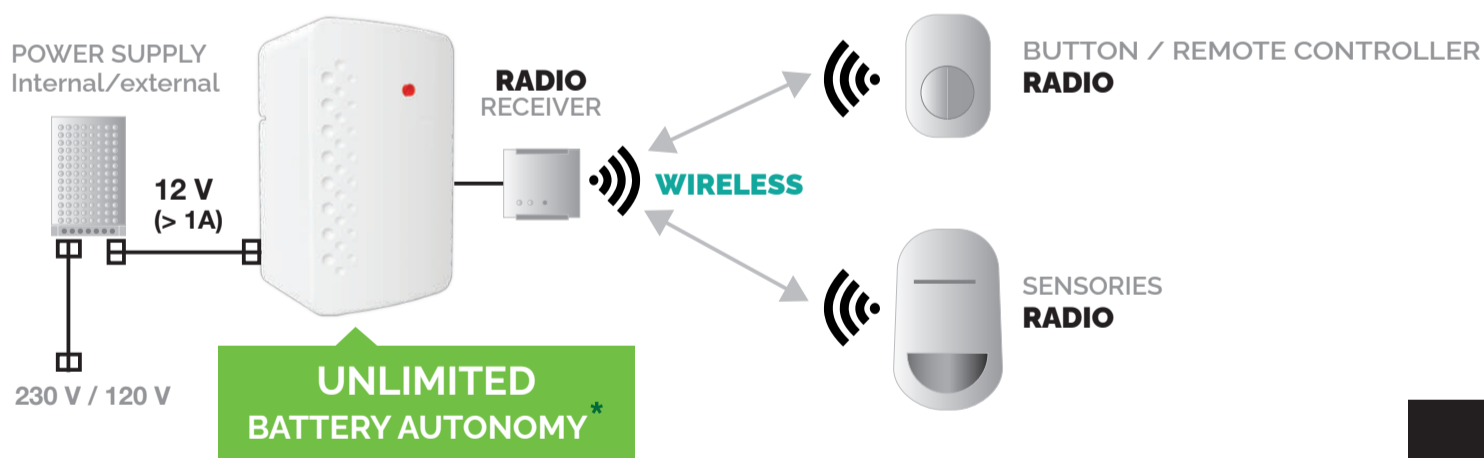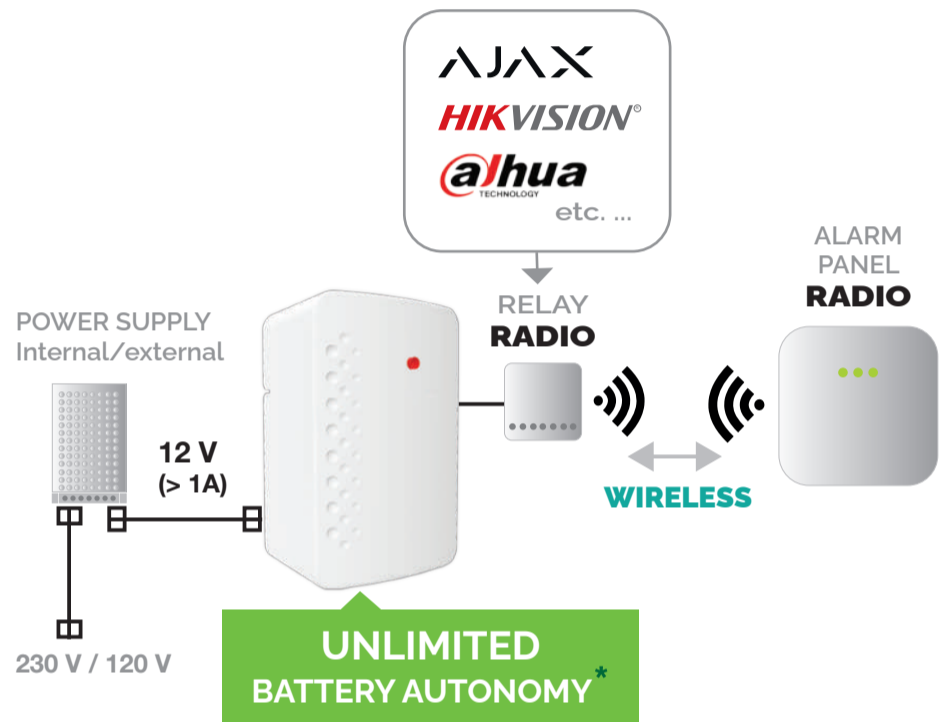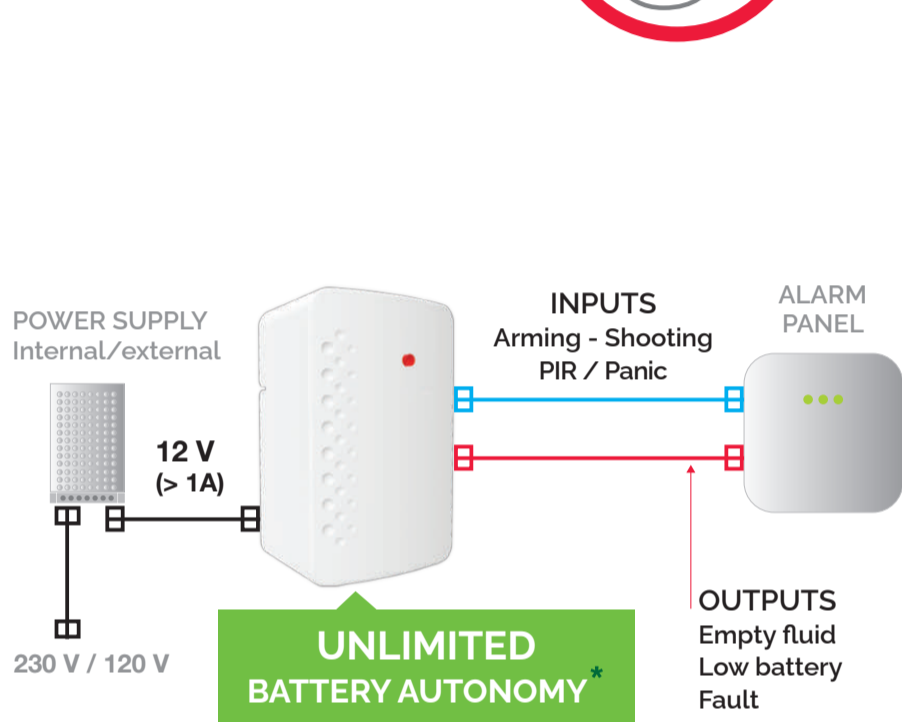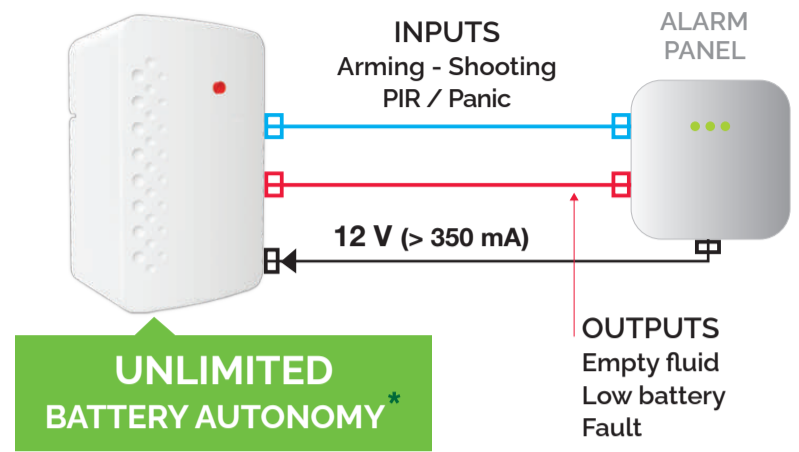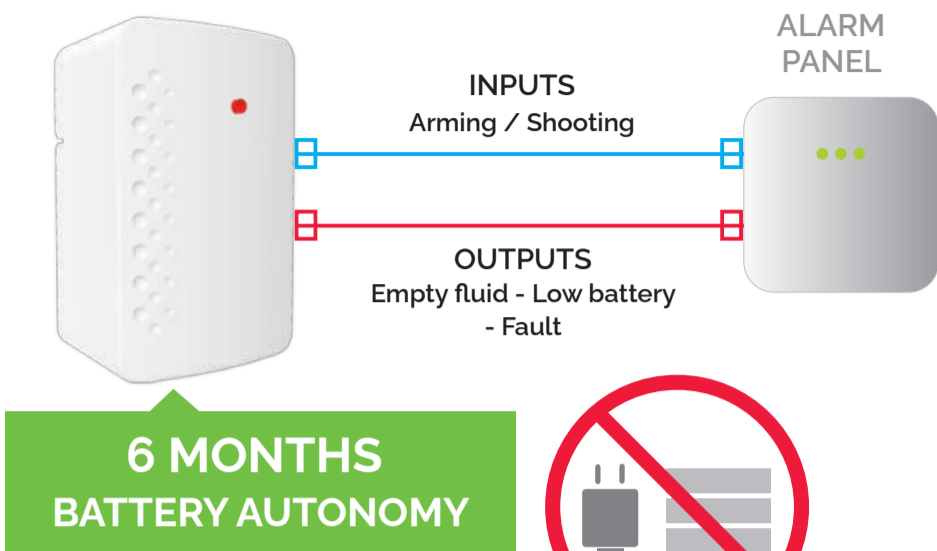

UR FOG security fogging systems have been certified and tested to ensure maximum safety and reliability.

Fog does not leave residues, it is non-toxic and is certified for use in the presence of people, animals and food products.



URFOG.COM